

# PERMEABILITY OF SOIL




# INDEX

- Introduction
- Importance of Permeability
- Darcy's law
- Factors affecting permeability of soil
- Laboratory Testing to find coefficient of permeability

# INTRODUCTION

## Definition


It is the property of soil which allows the flow of water through it.

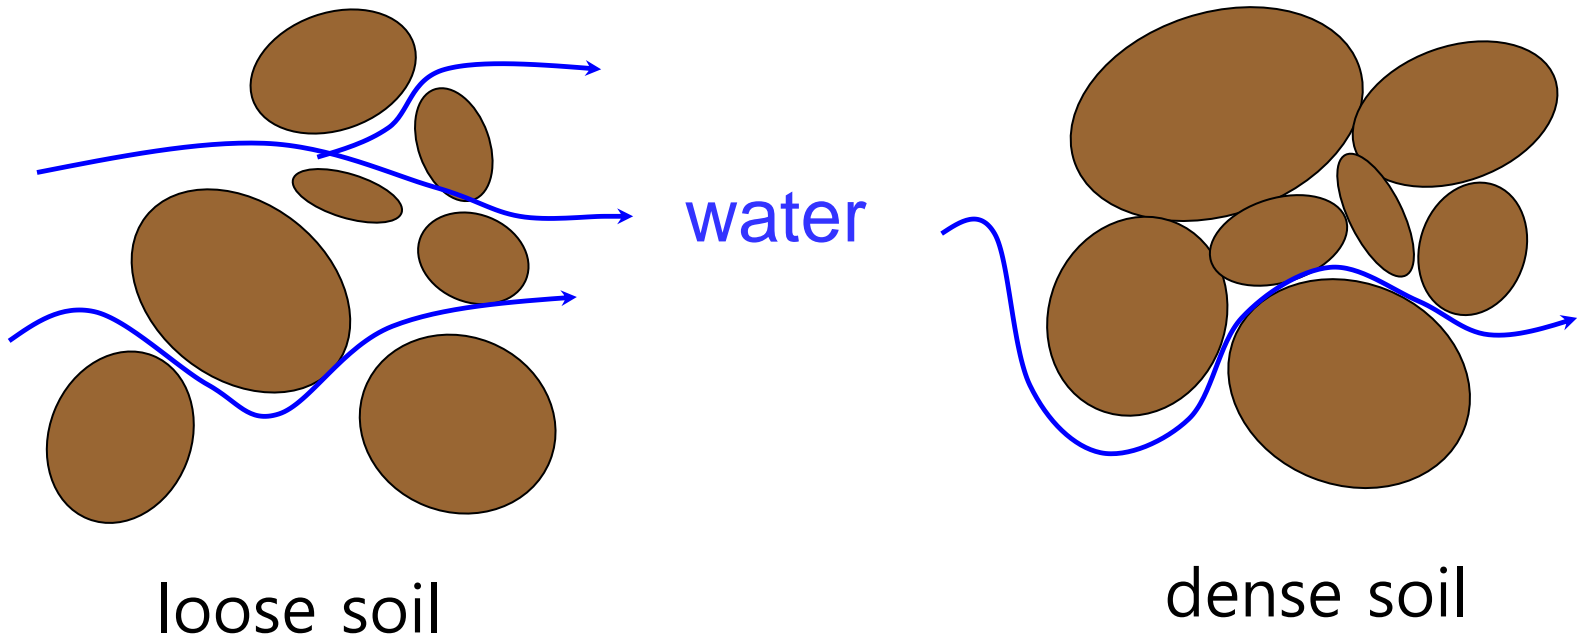

# Importance of Permeability

- The design of earth dams is very much based upon the permeability of the soils used.
- The stability of slopes and retaining structures can be greatly affected by the permeability of the soils involved.
- Filters made of soils are designed based upon their permeability
- Estimating the quantity of underground seepage

# Darcy's law

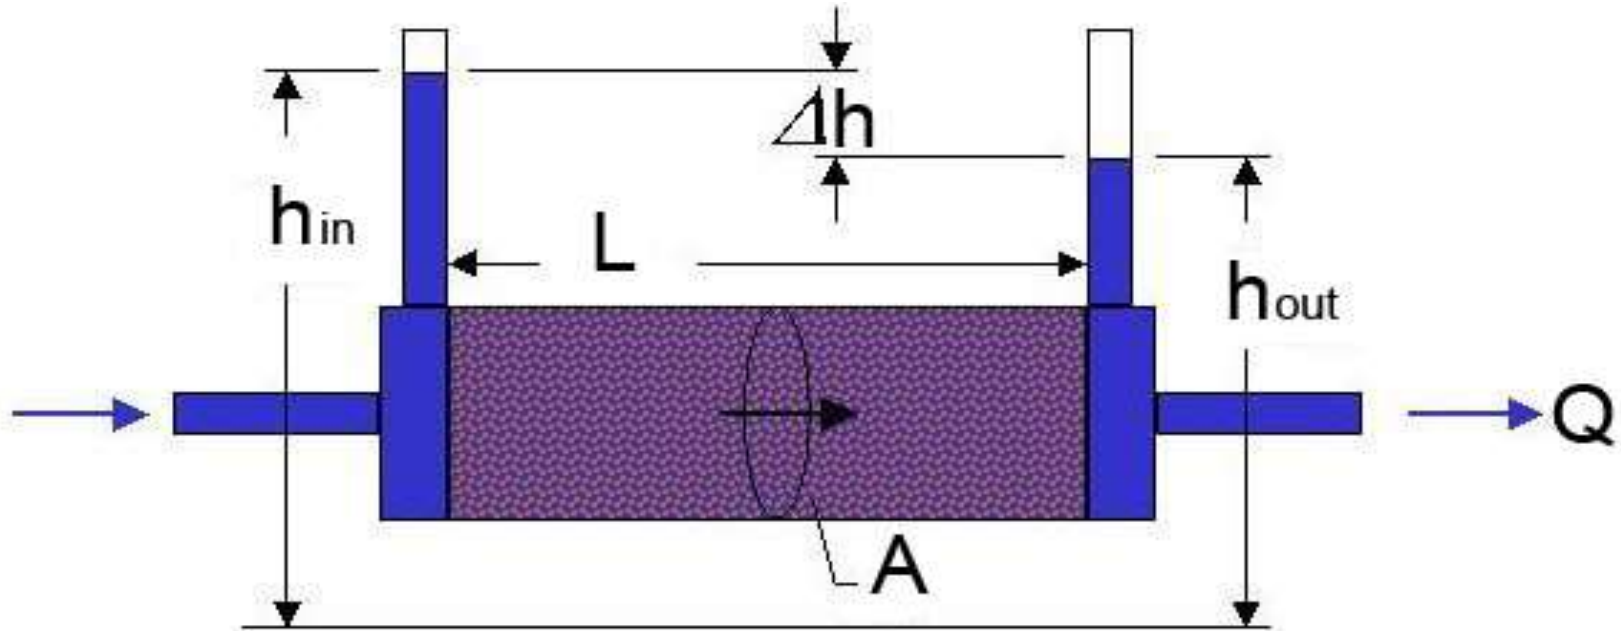

Where,

$A$  is the cross section of soil sample

$L$  is the length of the soil sample

$h_{in}$  is the head at the inlet

$h_{out}$  is the head at the outlet

$Q$  is the discharge

$q$  is the rate of discharge per unit time ( $t$ ) =  $Q/t$

# Darcy's law

It states that "In a saturated soil, under laminar flow condition, the rate of flow of water through given sample of soil is directly proportional to hydraulic gradient"

$$V = q/A = ki$$

$$q = kiA$$

Where,

V is the superficial velocity (m/sec)

k is the co-efficient of permeability (m/sec)

i is the hydraulic gradient =  $(h_{in} - h_{out})/L$

# Superficial velocity

It is defined as discharge per unit cross section area of soil

$$V = q/A$$

Where,

V is the superficial velocity (m/sec)

q is the discharge per unit time

A is the area of the soil sample

# Seepage velocity

It is defined as discharge per unit cross section area of voids to the direction of the flow soil

$$V_s = q/A_s$$

Where,

$V_s$  is the seepage velocity (m/sec)

$q$  is the discharge per unit time

$A_s$  is the area of voids

Relationship between superficial velocity and seepage velocity is

$$V_s = V/n$$

$n$  is the porosity



# Factors affecting permeability

- Particle size
- Properties of pore water
- Degree of saturation
- Presence of entrapped air & other foreign matter
- Structural arrangement
- Stratification of soil

# Factors affecting permeability


## Particle size

The Permeability varies approximately as the square of diameter of the soil

$$k = 100D_{10}^2$$

Where,

$D_{10}$  is the effective diameter of the soil

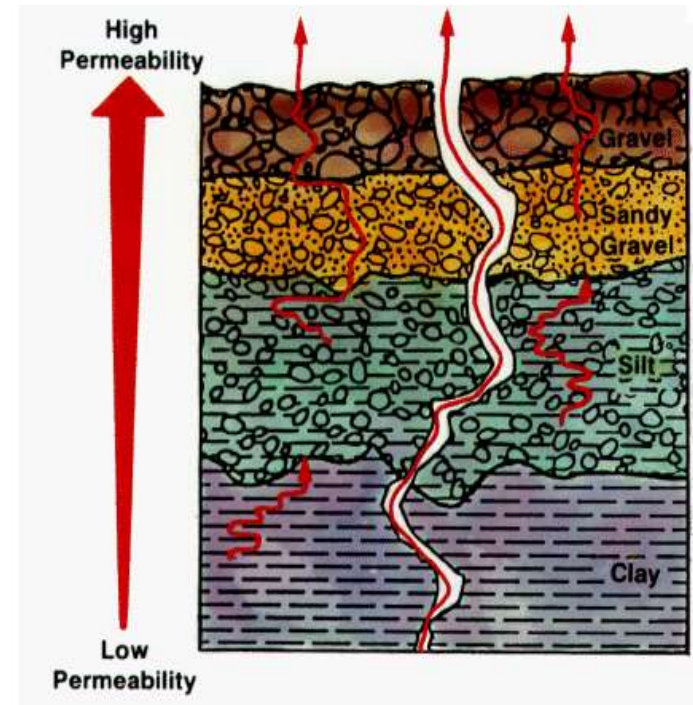

# Factors affecting permeability

## Property of pore water

The Permeability of the soil varies directly with density & inversely proportional to the viscosity of the water

$$k \propto \gamma_w / \mu$$

$$k = 1 / \mu$$

$$k\mu = \text{constant}$$

# Factors affecting permeability


## Void ratio

Increase in the void ratio increases the area available for flow hence permeability increases.

$$k \propto \frac{e^3}{1+e}$$

Where,

$e$  is the void ratio for the soil  
permeability  $k$

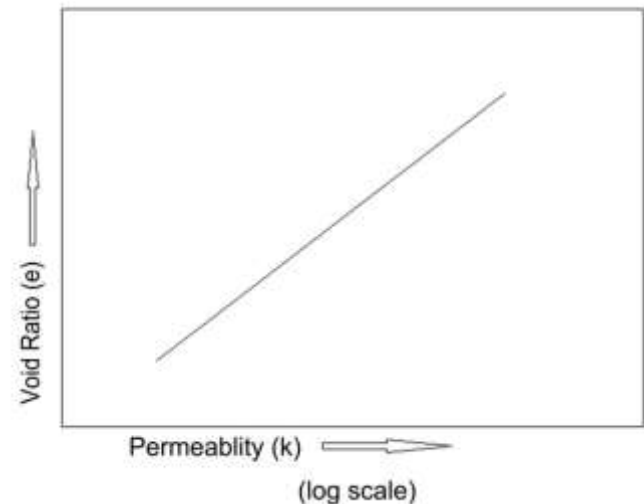


# Factors affecting permeability

## Degree of saturation

Higher the degree of saturation, higher will be the permeability.

## Presence of entrapped air & Other foreign matter


The entrapped air and foreign matter will block the voids in soil results in decreasing in permeability

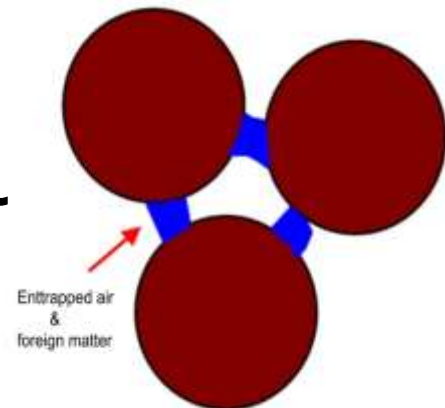


# Factors affecting permeability

## Structural arrangement

For same void ratio the permeability of the soil will be more in flocculated structure as compare to Dispersed structure.

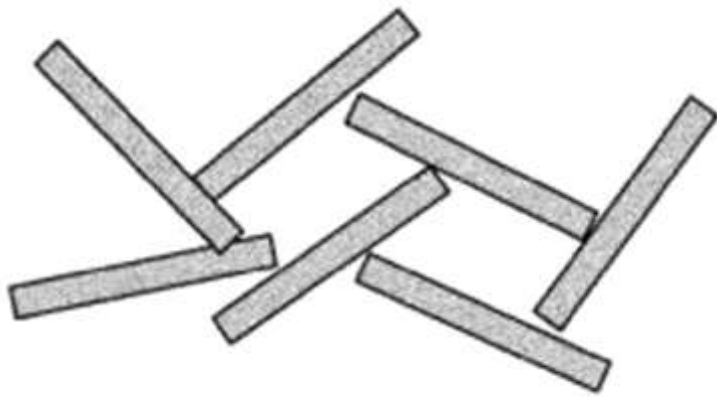

Flocculated structure

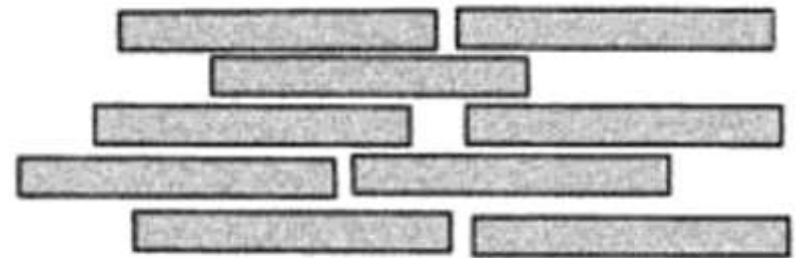


Dispersed structure

# Factors affecting permeability

## Stratification of soil

Stratified soil deposits have greater permeability parallel to the plane when compared to perpendicular to the plane.

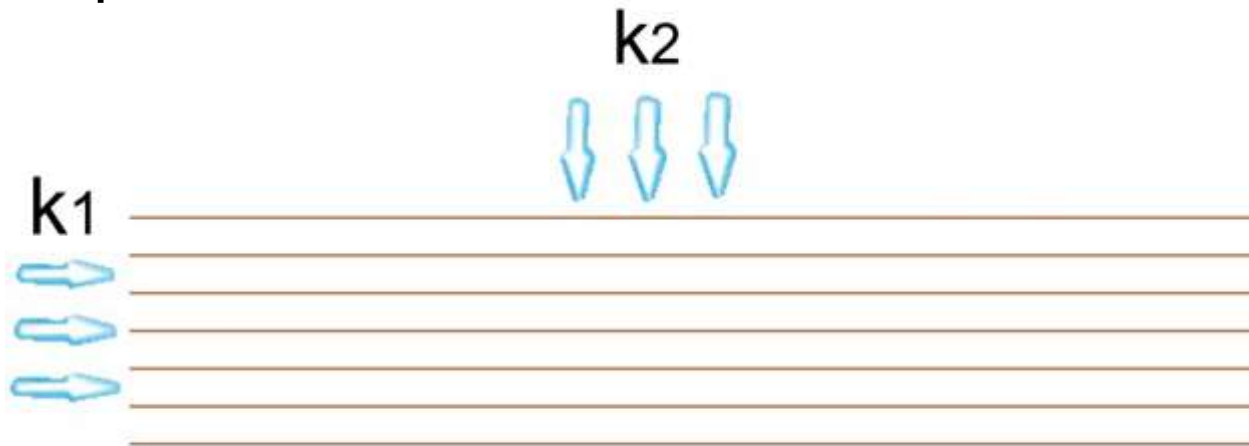

$$k_1 > k_2$$

# Laboratory Testing to find coefficient of permeability

Two standard laboratory tests are used to determine the coefficient of permeability of soil

- The constant-head test
- The falling-head test.



# Laboratory Testing to find coefficient of permeability

## The constant-head test

- The constant head test is used primarily for **coarse-grained soils**.
- This test is based on the assumption of laminar flow (Darcy's Law apply)


$$k = \frac{V \cdot L}{h \cdot A \cdot t}$$

Where:

Q = volume of water collection

A = cross section area of soil specimen

t = duration of water collection

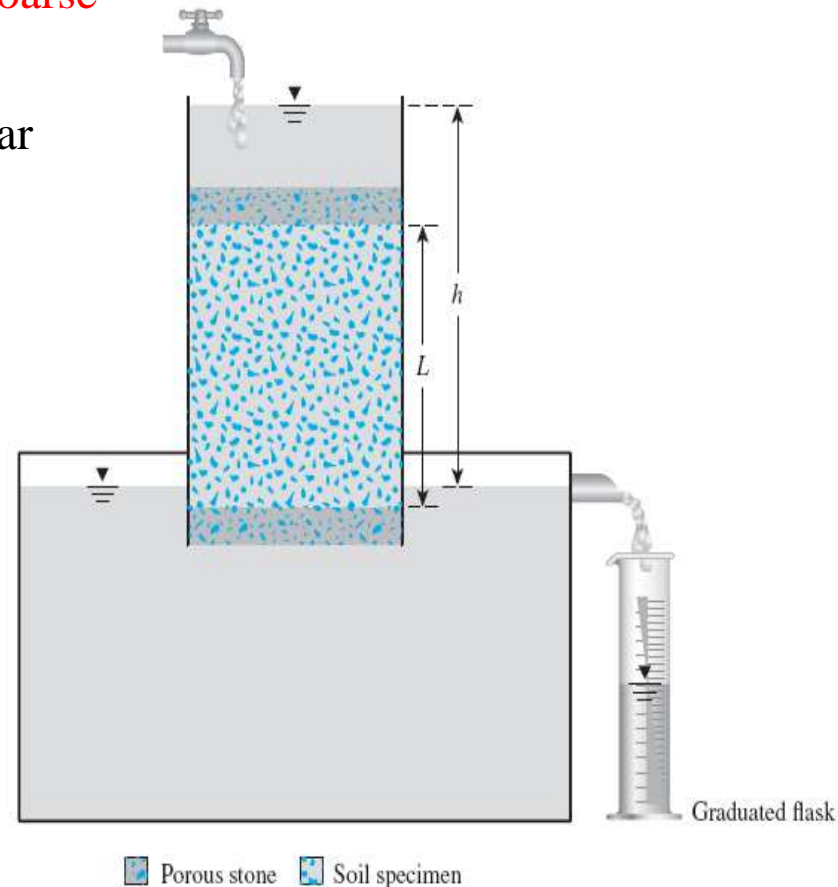

# Laboratory Testing to find coefficient of permeability

## Falling Head Test

- Variable head method is adopted for highly **impervious soils**
- This test is conducted when water flows through the soil is very small such that it is very difficult to measure discharge

$$k = \frac{2.30aL}{At} \log_{10} \frac{h_1}{h_2}$$

Where,

$h_1$  is the initial head

$h_2$  is the final head

$a$  is the c/s area of the stand pipe


$A$  is the c/s area of soil sample

$L$  is the length of the soil sample

$t$  is the time

$a$  = cross sectional area of standpipe

$A$  = cross sectional area of soil

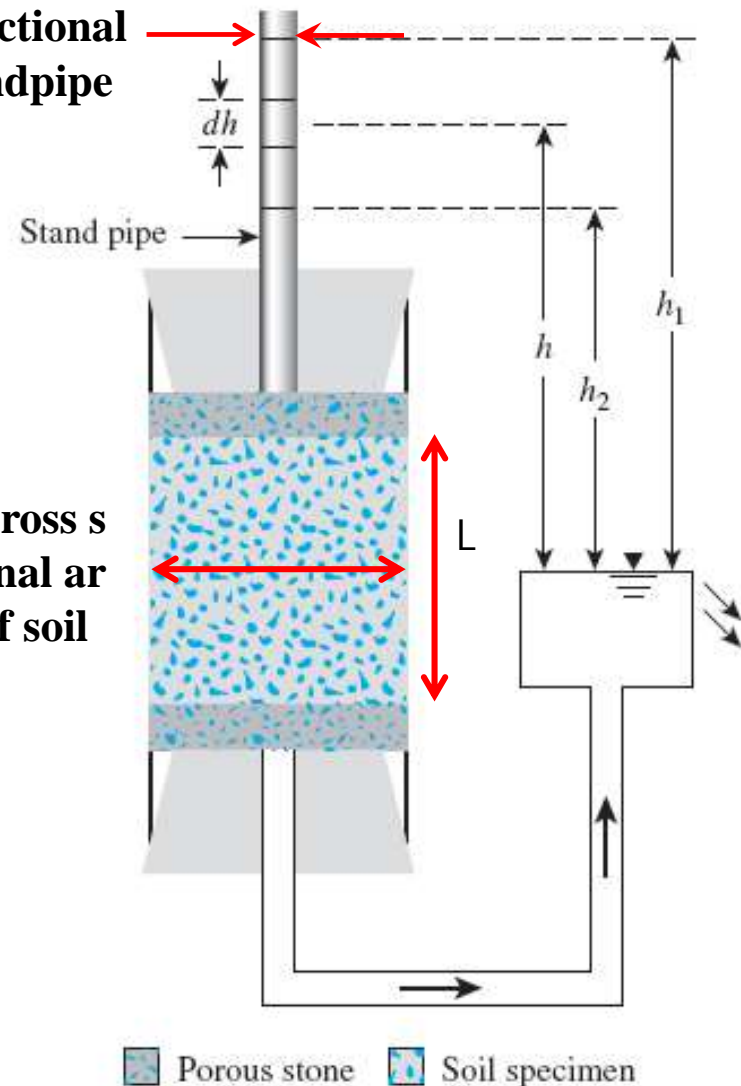



thank you!